


ACT-600H

UHF Digital Handheld Transmitter

FEATURES

- Designed for use with ACT-600 Series receivers, delivering stable and reliable digital performance.
- Ergonomic metal housing provides comfortable handling, low handling noise, and a professional appearance.
- Patented integrated control module combines power, mute, setting keys, LCD display, and locking slider to prevent accidental operation.
- Specially designed capsule assembly with removable upper grille for cleaning and threaded lower grille for impact, rolling, and pop noise protection.
- Supplied with MU-85A cardioid condenser capsule; supports interchangeable MIPRO condenser and dynamic capsules, as well as selected third-party capsules.
- Supports essential settings including mute mode, input sensitivity, low-cut filter, audio limiter, RF output power, and key lock with clear display.
- Three-stage gain adjustment helps maintain proper input level across different vocal applications.
- Built-in MIPRO ACT™ function enables fast and accurate frequency synchronization.
- Patented dual-format battery compartment supports both AA batteries and rechargeable Li-ion batteries.
- USB Type-C charging port and charging contacts with protection circuitry support cable and drop-in charging.
- Replaceable color-coded ID ring for channel identification; patented antenna cover integrates an efficient wideband transmitting antenna.

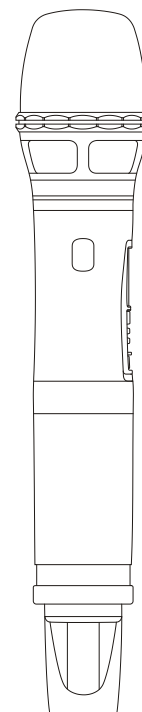

SPECIFICATIONS

Frequency Range	UHF 480–934 MHz (country dependent)
Bandwidth	48 MHz
Display	Backlit LCD displays channel, battery status, AF signal levels and setting menu
Control Interface	ACT sync sensor, setting buttons and mute button
Encryption	256-bit
Mic. Capsule Modules	MU-85A condenser or other compatible capsule modules
Audio Control	AF Gain, Low Cut, and AF Limiter
Gain Setting	0 dB to +6 dB / 3 dB per segment
RF Power Output	10 mW / 50 mW switchable (country dependent)
Power Supply	One 18500 Li-ion battery or two AA alkaline
Battery Charging	MP-800 / MP-820 charging dock or USB Type-C
Dimensions	51 × 272 mm (Ø × L)
Weight	Approx. 331 g