


BC-100 Conference Microphone Base

Features

- BC-100 can connect with MM-206J / MM-205J / MM-204J gooseneck microphone to be a desktop conference microphone.
- BC-100 with a built-in high-sensitivity condenser microphone can be independently used as a boundary microphone.
- Insert a MIPRO ACT-32TC Series bodypack transmitter into the BC-100 base as a wireless conference microphone.
- The back panel has a balanced XLR connector for any mixer supplying phantom power and a switch to select the audio source from either the inner boundary microphone or the optional gooseneck microphone.
- A TALK / MUTE button with a LED status indicator provides easy speaking or mute option.
- The housing is made of metal with a reinforced base and anti-slip pad to give added stability.

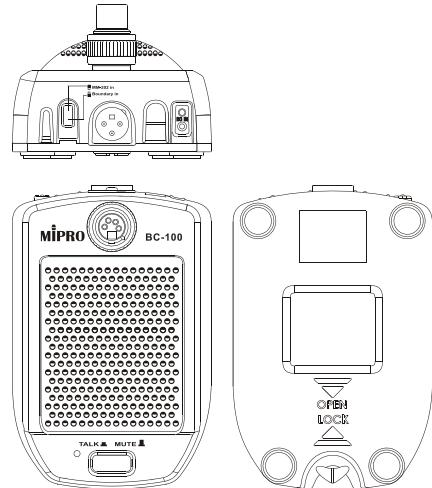

Specifications

Built-in Boundary Microphone	Ø 10 mm cardioid condenser microphone
Input Jack	4 pin XLR female
Output Jack	Balanced XLR male
TALK / MUTE Button	Mechanical PUSH-HOLD switch, with LED status indicator.
Power Supply	External 24 ~ 48 V DC phantom power is required.
Color	Black
Dimensions	100 x 78 x 150 mm (W x H x D)
Weight	Approx. 620 g
Note	Refer to the actual product in the event of product discrepancy.



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. MI022/01