

# X WALL

All-in-One Meeting Room Display System Solution



## QSTECH GROUP

### QSTECH Xi 'an

Address: No. 7, 2nd Biyuan Road, High-tech District, Xi 'an, Shaanxi Province.

### QSTECH Shenzhen

Address: No. 5318, West Shahe Road, Nanshan District, Shenzhen.

### QSTECH Beijing

Address: Wanghe Building, No. 35 Erlizhuang, Haidian District, Beijing.

Tel: +86 29 8177 9031

+86 29 8177 9033

E-mail: marketing@qs-tech.com


Web: www.qs-tech.com



website




## APPEARANCE

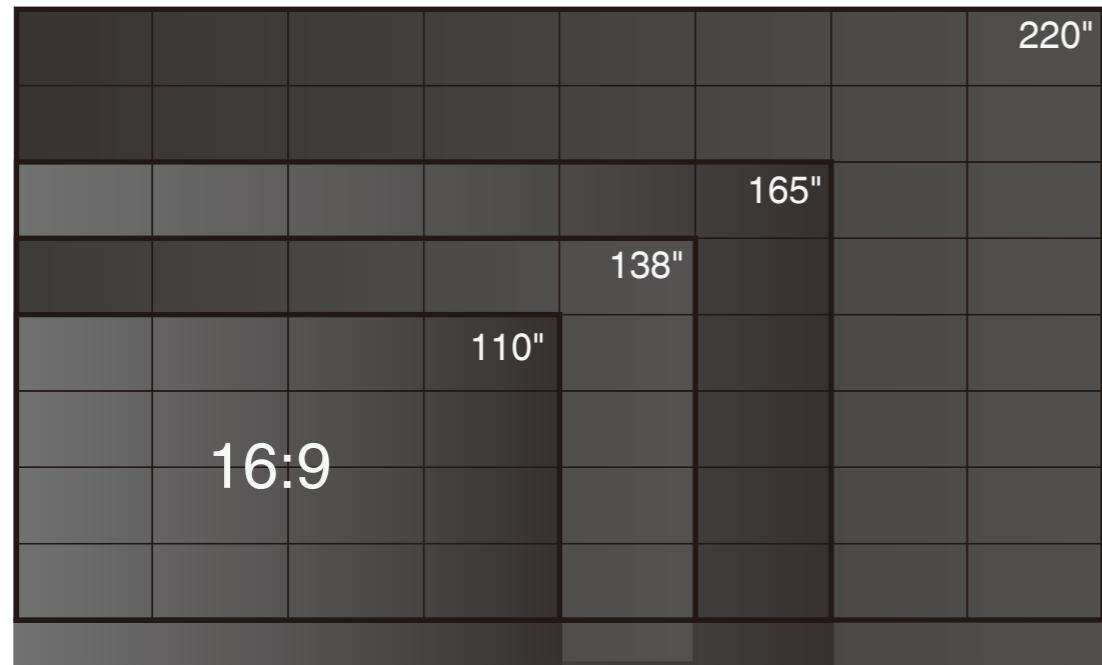

**Application:** multifunctional conference room, training room, classroom, exhibition center, theater, cinema, monitoring center, command center and etc.

SPECIFICATIONS	X WALL 110"	X WALL 138"	X WALL 165"	X WALL 220"
Size	110"	138"	165"	220"
Pixel Pitch(mm)	1.2	1.5	1.9	2.5
Brightness(nit)	100~500	100~500	100~600	100~600
Refresh Rate(Hz)	1920~3840	1920~3840	1920~3840	1920~3840
Resolution	1920x1080	1920x1080	1920x1080	1920x1080
Power Consumption(Max/Ave)(W/display)	2500/850	3000/1020	3060/1040	5120/1740
Display Area(mm)	2440x1373	3050x1716	3660x2059	4880x2745
Overall Dimension(mm)	2453x1503x38.5	3063x1846x38.5	3673x2189x38.5	4893x2875x60
Weight(kg)	134	201	282	526.5
IP Rating	IP30	IP30	IP30	IP30
Gray Scale(Bit)	14	14	14	14
Viewing Angle(H/V)	160°/160°	160°/160°	160°/160°	160°/160°
Input voltage(V)	AC 100-240V	AC 100-240V	AC 100-240V	AC 100-240V
Installation Method	Foot mounting/Wall mounting	Foot mounting/Wall mounting	Foot mounting/Wall mounting	Wall mounting
Maintenance	Front	Front	Front	Front
Operating Temperature/Humidity( C/RH)	-10~40/10%~85%	-10~40/10%~85%	-10~40/10%~85%	-10~40/10%~85%


- All-in-One with slim body and light weight modular design to save your space and make your boardroom brilliant.

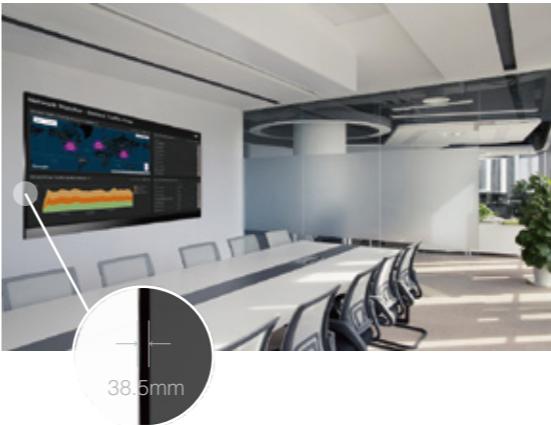

- Seamless surface, adjustable brightness and color temperature, 100% image restoration to bring you HD visual experience.



- All-in-One with either foot standing or wall mounting frame included; Installation to be finished within 1 hour by 2 person.

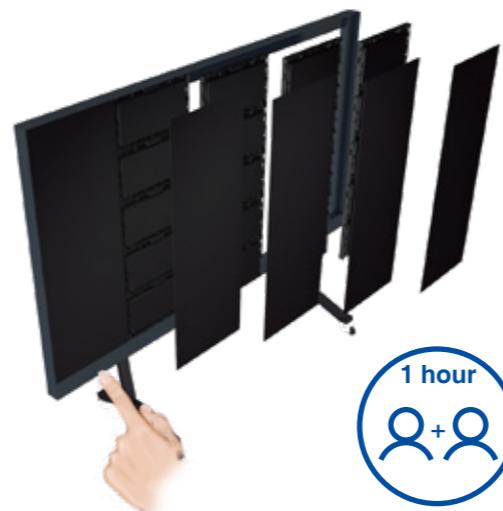


- Integrated with external devices, wireless screen transmission, remote video conference, and multi-windows splicing are available to maximize user engagement.



- 160° super wide viewing angle and 2-30 meters long visible distance to make every seat VIP.



- 100,000 hours service life.

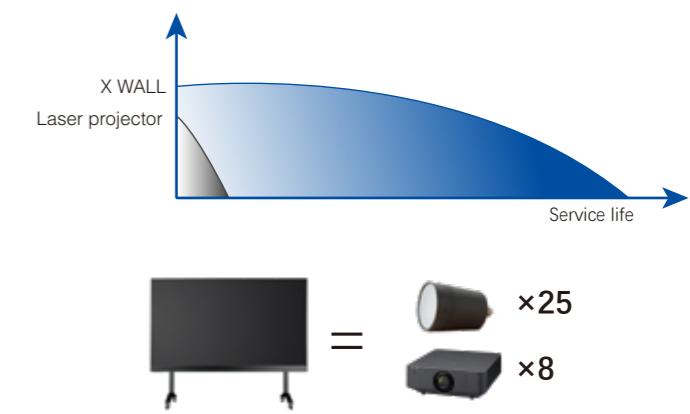

1 X WALL = Service life of 25 light projectors or 8 laser projectors